

MEDIDAS STANDARD ANÉIS BACKUP

W= 1,35 ± 0,08
A= 1,14 ± 0,08
T=1,24

Código	D.I. (mm)
8006	3,56
8007	4,34
8008	5,13
8009	5,94
8010	6,73
8011	8,31
8012	9,91
8013	11,56
8014	13,16
8015	14,73
8016	16,33
8017	17,91
8018	18,51
8019	21,08
8020	22,68
8021	24,26
8024	29,03

W= 2,18 ± 0,08
A= 1,14 ± 0,08
T=1,35

Código	D.I. (mm)
8110	9,91
8111	11,48
8112	13,08
8113	14,66
8114	16,26
8115	17,83
8116	19,43
8117	21,11
8118	22,68
8119	16,26
8120	25,86
8121	27,46
8122	29,03
8123	30,63
8124	32,21
8125	33,81
8126	35,38
8127	36,98
8128	38,56
8129	40,16
8130	41,73
8132	44,91
8133	46,51
8134	48,08
8135	49,68
8136	51,26
8139	56,03
8140	57,61
8141	59,21
8143	62,38
8144	63,96
8145	65,56
8146	67,13
8147	68,73
8149	71,91
8150	73,48
8151	76,66
8152	83,01
8154	95,71
8155	102,06

W= 3,00 ± 0,08
A= 1,02 ± 0,08
T=1,27

Código	D.I. (mm)
8205	11,56
8206	13,16
8207	14,73
8208	16,33
8210	19,46
8211	21,03
8212	22,63
8214	25,81
8215	27,38
8216	28,98
8217	30,56
8218	32,16
8219	33,88
8220	35,48
8221	37,06
8222	38,66
8223	41,83
8224	45,01
8225	48,18
8226	51,36
8227	54,53
8228	57,71
8229	69,88
8230	64,06
8231	66,83
8232	70,00
8233	73,18
8234	76,35
8235	79,53
8236	82,70
8237	85,88
8238	89,05
8239	92,23
8240	95,40
8241	98,58
8242	101,75
8243	104,93
8244	108,10
8245	111,28
8246	114,45
8247	117,63
8248	121,11
8249	124,28
8250	127,46
8251	130,63
8252	133,81
8253	136,98
8254	140,16
8255	143,33
8256	146,51
8257	149,68
8258	152,86
8259	159,21
8260	165,56
8261	171,91
8262	178,26
8263	184,61
8267	210,01
8269	222,71
8278	305,26


W= 4,65 ± 0,13
A= 1,52 ± 0,10
T=1,93

Código	D.I. (mm)
8312	16,20
8314	19,50
8317	24,13
8318	25,73
8320	28,91
8324	35,25
8325	38,43
8326	41,61
8327	44,78
8328	47,96
8329	51,13
8330	54,31
8331	57,61
8332	60,78
8333	63,96
8334	67,13
8335	70,31
8336	73,48
8337	76,68
8338	79,83
8339	83,13
8340	86,31
8341	89,48
8342	92,66
8343	95,83
8344	99,01
8345	102,31
8346	105,49
8347	108,66
8348	111,84
8349	115,01
8350	118,19
8351	121,36
8352	124,54
8353	127,71
8354	130,89
8356	137,24
8357	140,41
8358	143,59
8359	146,76
8360	149,43
8361	153,11
8362	159,46
8363	165,81
8364	172,16
8365	178,51
8366	184,86
8367	191,21
8368	197,56
8370	210,26
8372	222,96
8373	229,31
8375	242,01
8378	267,41

W= 5,99 ± 0,15
A= 2,44 ± 0,13
T=2,97

Código	D.I. (mm)
8425	115,6
8426	118,77
8427	121,95
8428	125,20
8429	128,30
8432	137,82
8433	141,00
8437	153,70
8439	165,71
8441	178,41
8443	191,11
8444	197,46
8445	203,81
8446	216,51
8447	229,21
8454	254,61

COTAS

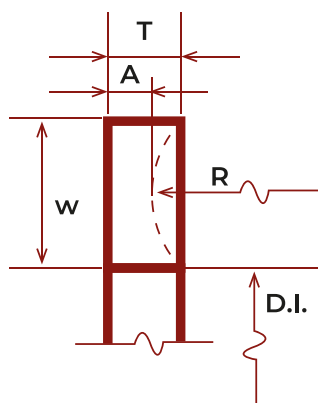

DIMENSÕES DO CANAL DE ALOJAMENTO DO ANEL O'RING

